



WV/8726/HF
VER1KR 6 ECPHF DWU

T/R2 CAN2
T/R3 CAN3
T/R4 CAN4

6

Reset 3 5


1



引脚名称	功能说明

2

)" &" %

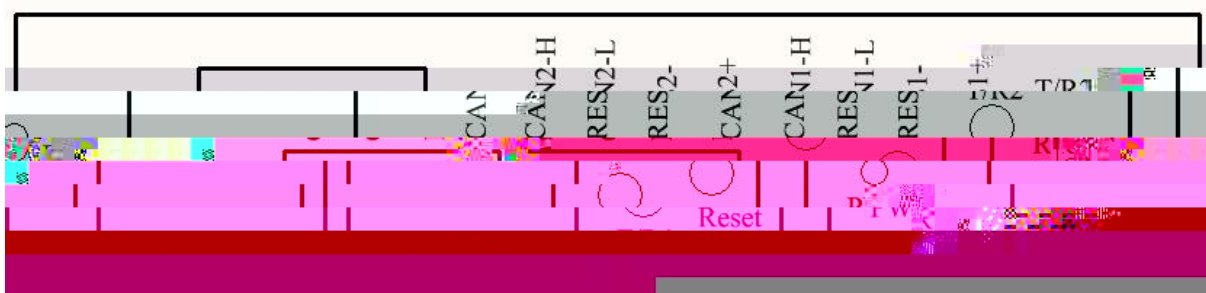

3 RJ45





4

3.81-4pin


* CAN-bus CAN 120R

5 CANFD/CAN2.0 Bus

		5K		5M	Bps
				110	pcs
0	CANH	2.75	3.5	4.5	V
	CANL	0.5	1.5	2	
1	CANH	2	2.5	3	
	CANL	2	2.5	3	



	0	1.2	2	3.1	V
	1	-0.5	0	0.05	
		-18		18	

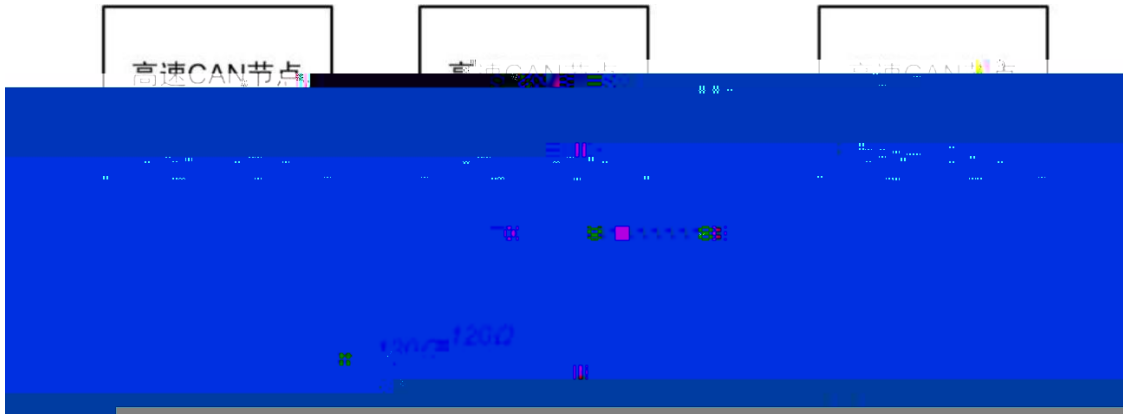

CAN

CAN

ISO11898-2

CAN

120»

120»

CANFDNET

CAN-Bus



75B Ž =8 Ž

%

%

\$

%

75B

%

%

75B

%

%

%

75B

%

.....

% 75B %

%

75B

6] h+

6] h\$

:: .

%

\$

FHF

%

\$

\$

%

8' r8\$

75B

=8

!



6] h+

6] h\$

::	FHF			8	&	8%	8\$
----	-----	--	--	---	---	----	-----

:::

% \$

FHF

75B&" \$ 75B: 8 % 75B: 8 \$ 75B&" \$

% \$

8' r8\$

75B: 8

, - 5 6 7 8 9 :

75B: 8

, %& %* &\$ &(' & (, *(



=8

(

%%

&-

%&\	'(\)*\	+, \
-----	-----	-----	------

\$\$\	\$\$\	\$' \	:: \
-------	-------	-------	------

=8

=8

\$! %&' (*)*+,

\$! ' ::



*(

8' r8\$

85H5%

85H5*(

%&\	&&\	' '\	((\)\	**\	++\	,, \	\$\$\		\$\$\
-----	-----	------	-----	----	-----	-----	------	-------	--	-------

85H5%


85H5*(

%&\	&&\	' '\	((\)\	**\	\$\$\	\$\$\	\$\$\		\$\$\
-----	-----	------	-----	----	-----	-------	-------	-------	--	-------

*

*" &

+ KYV

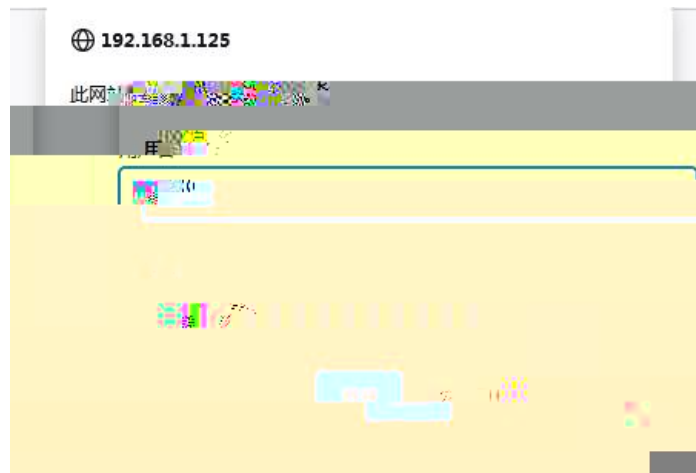

UXa] b




CAN



75B%


' "%

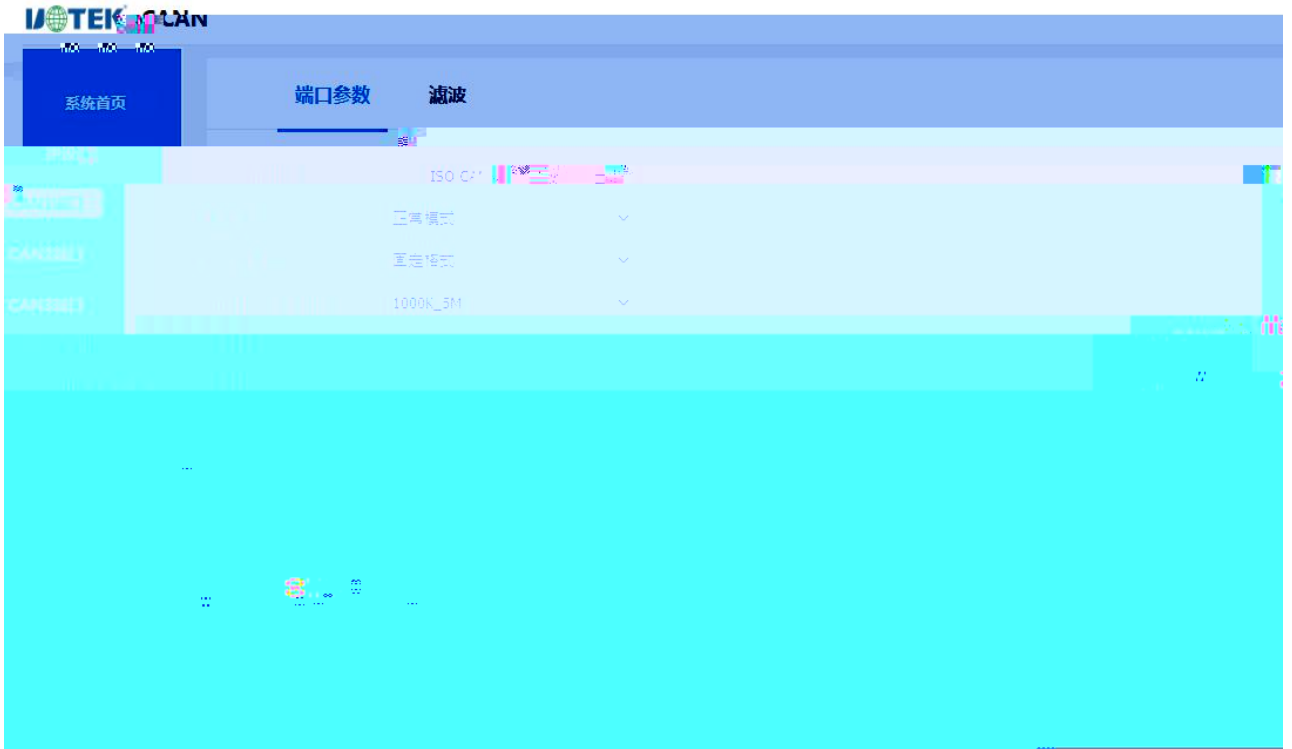

CAN	CAN BUS	CAN	CAN ISO	CAN NON-ISO
CANFD	CANFD	CAN	CAN2.0	
	120»			
CAN		TCP Server	TCP Client	UDP
	IP			



'"&

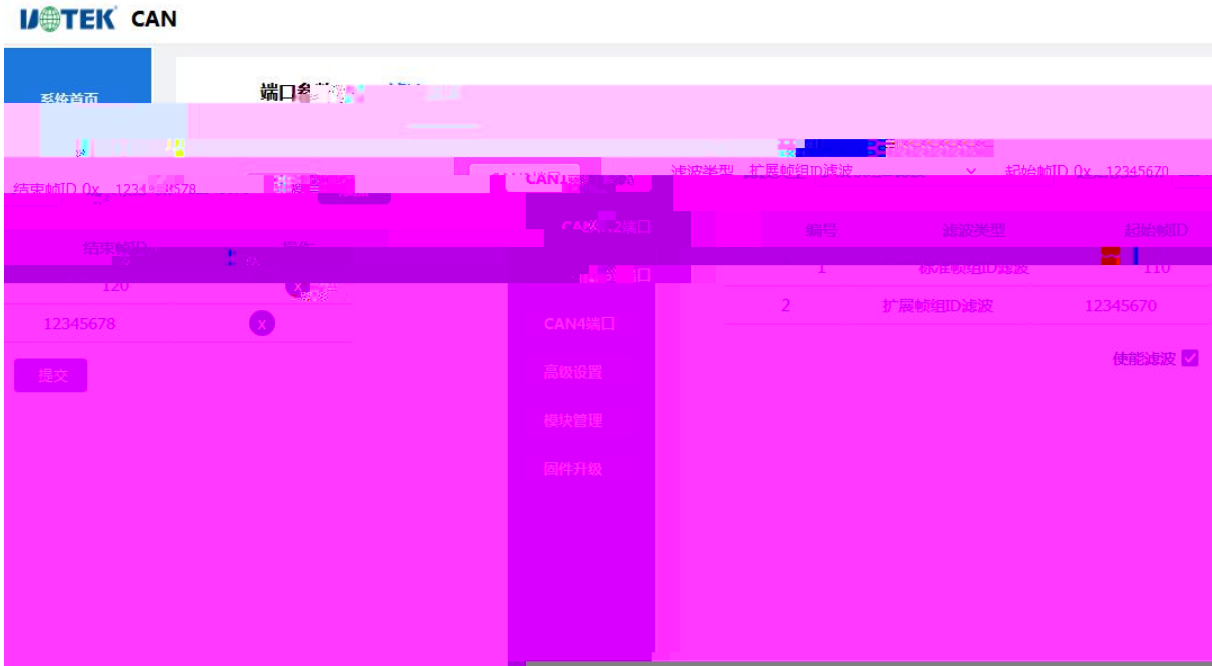

		ID	ID
ID		ID	
ID		ID	
1	ID		
2	ID		ID
3	ID	ID	ID



...



=8	75B =8 %*
	75B: 8
	75B 75B: 8 75B: 8
	\$r*)')') \$
ag	%*)')')ag
	75B , 75B: 8 *(%% && '' (()) ** ++ ,, ,


75B& 75B' 75B(

CAN2 CAN3 CAN4

CAN1

CAN1



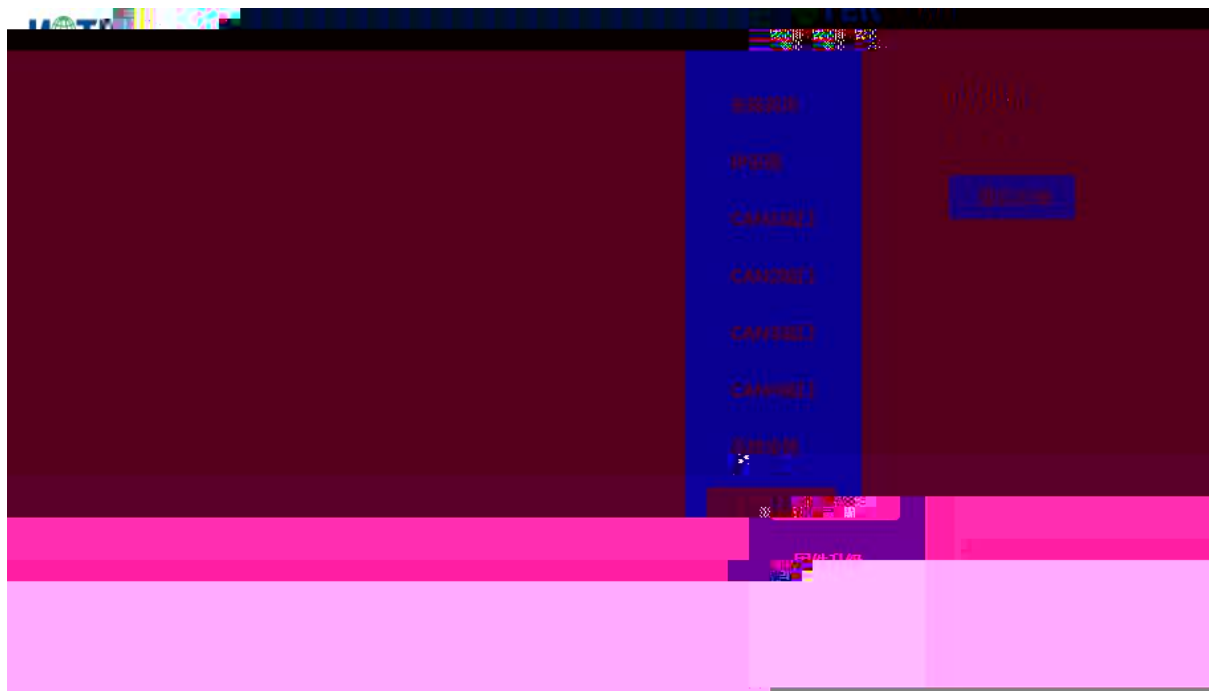



	##\$A	\$A	75B: 8
I H! *)\$(!: 8	%	!	(